


# HSP

ISO  
4401**SOUPAPES DE SURETE MONOBLOC****MONOBLOCK SAFETY VALVES****DRUCKBEGRENZUNGSVENTILE MONOBLOCK**Taille 5  
Size 5  
NG 10

Version Montage Ausführung	Plage de pression Pressure range Druckbereich	P max Q max	Référence Part number Bestellnummer
----------------------------------	---	----------------	---

Modulaire monobloc Modular monoblock Modular Monoblock	7 - 210 bar	315 bar 60 l/mn	HSP	3JM	20	a	**	b
	7 - 315 bar		HSP	3JM	35	a	**	b

<b>a</b>	<b>Matière joint Seal materials Dichtungswerkstoffe</b>
H	Nitrile (standard)
V	Viton


<b>b</b>	<b>Réglage Adjustment Einstellung</b>
Z	Vis Screw Schraube
W	Bouton Hand knob Drehknopf
T	Vis avec plombage Tamperproof screw Verplombte Schraube

- Limiteur de pression à action directe amorti à clapet. Accepte contre pression dans la ligne de retour au réservoir.

- Direct acting relief valve, poppet type with dashpot. Full tank line back pressure capability.

- Direktgeschaltetes Druckbegrenzungsventil mit Dämpfung. Erlaubt Gegendruck in der Rückleitung zum Tank.


sur demande  
on request  
auf Anfrage

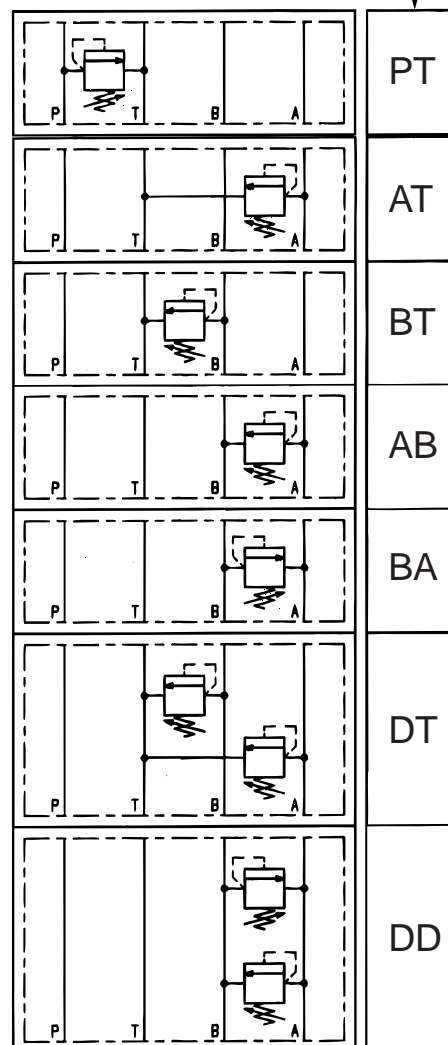

Version Model Ausführung	Poids Weight Gewicht	<b>HSP 3JM...</b>
AT - BT AB - BA	3.05 kg	
DT - DD	3.20 kg	


**Caractéristiques Performance Kennlinien**

**Courbes de régulation  $P = f(Q)$**   
Viscosité 30 cst

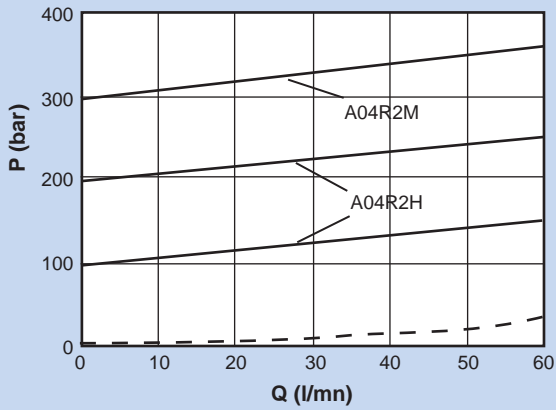

**Pièces de rechange Spare parts Ersatzteile**

		Code
Pochette de joints (10 cartouches) Seal kit (10 cartridges) Dichtungssatz (10 Patronen)		SK30526N
Joints plan de pose (20 o-rings) Interface seal kit (20 d-rings) Lochbild (20 o-rings)		1843200
Cartouches Cartridges Patronen	20 - A04R2HZN (7 à 210 b) 35 - A04R2MZN (7 à 315 b)	

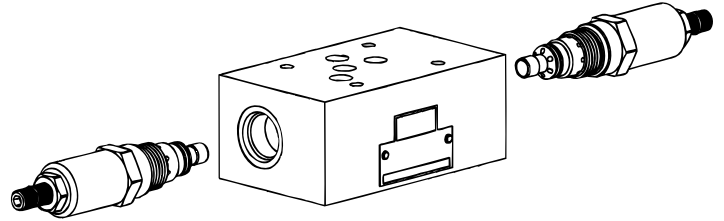

**Encombrement Overall dimensions Abmessung**

